



X60 线色功能 The line for X60 controller

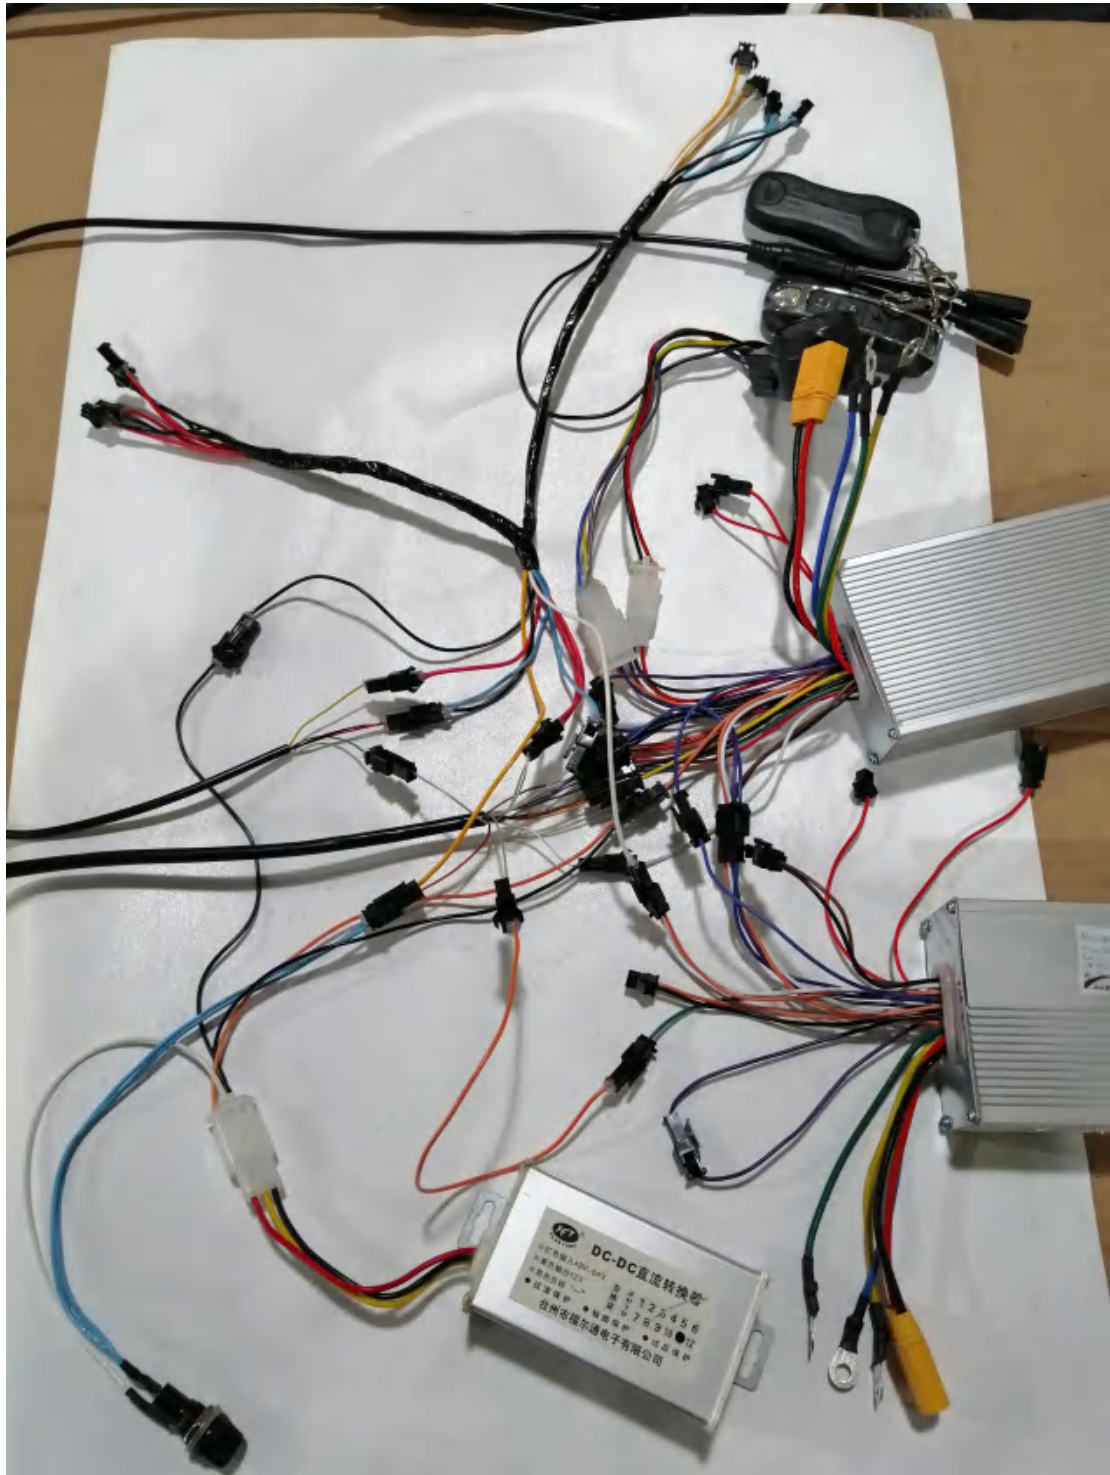

X60 线色功能

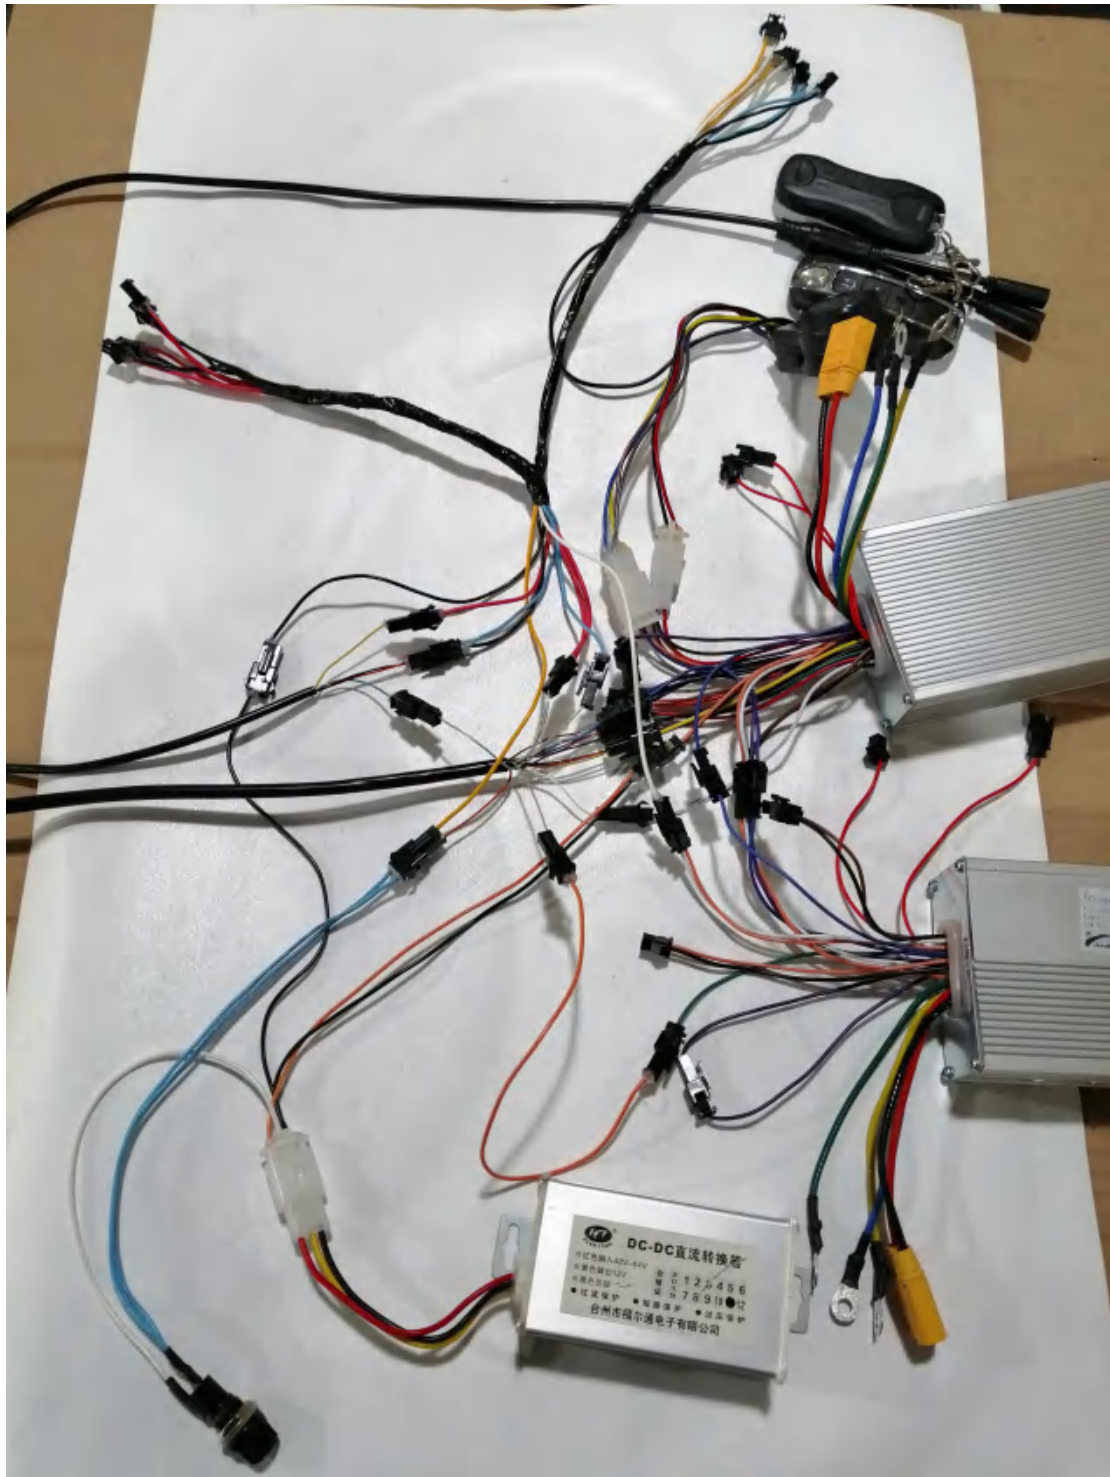

X60 线色功能




Connect the black and brown lines of the A controller and B controller. The function is speed limitation.

X60 线色功能




Connect the blue lines of the A controller and B controller. It is the anti-theft signal line.

X60 线色功能

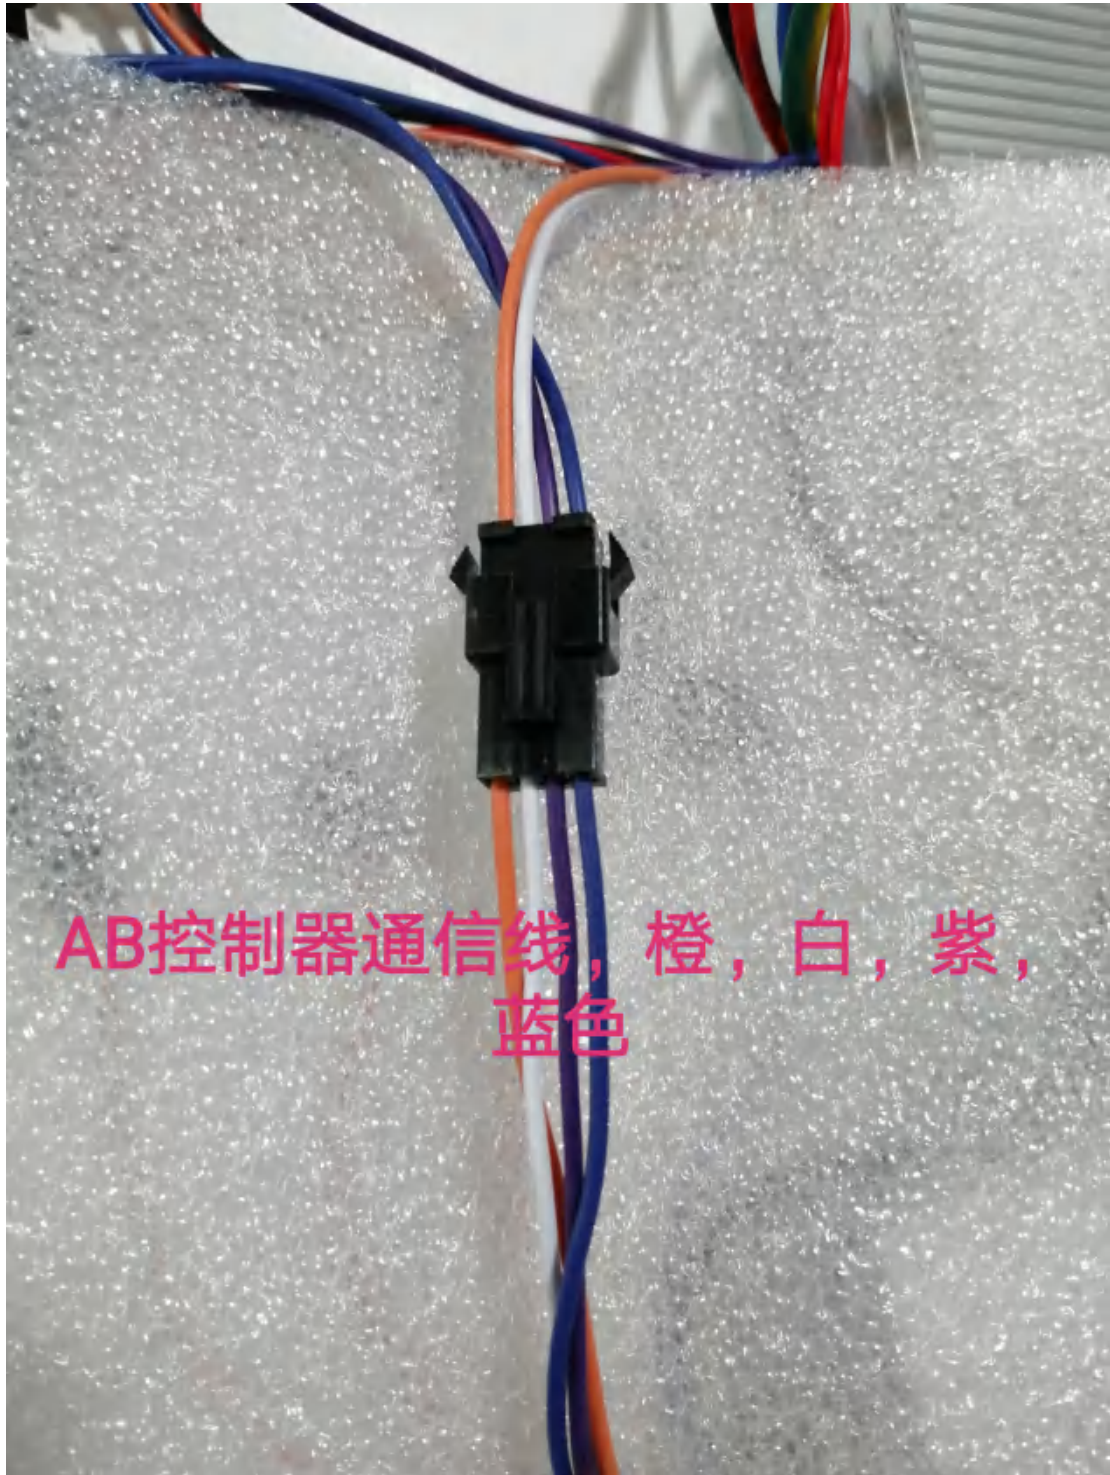

Connect the orange, white, purple and blue lines of the A controller and B controller. It is the communication line.

X60 线色功能

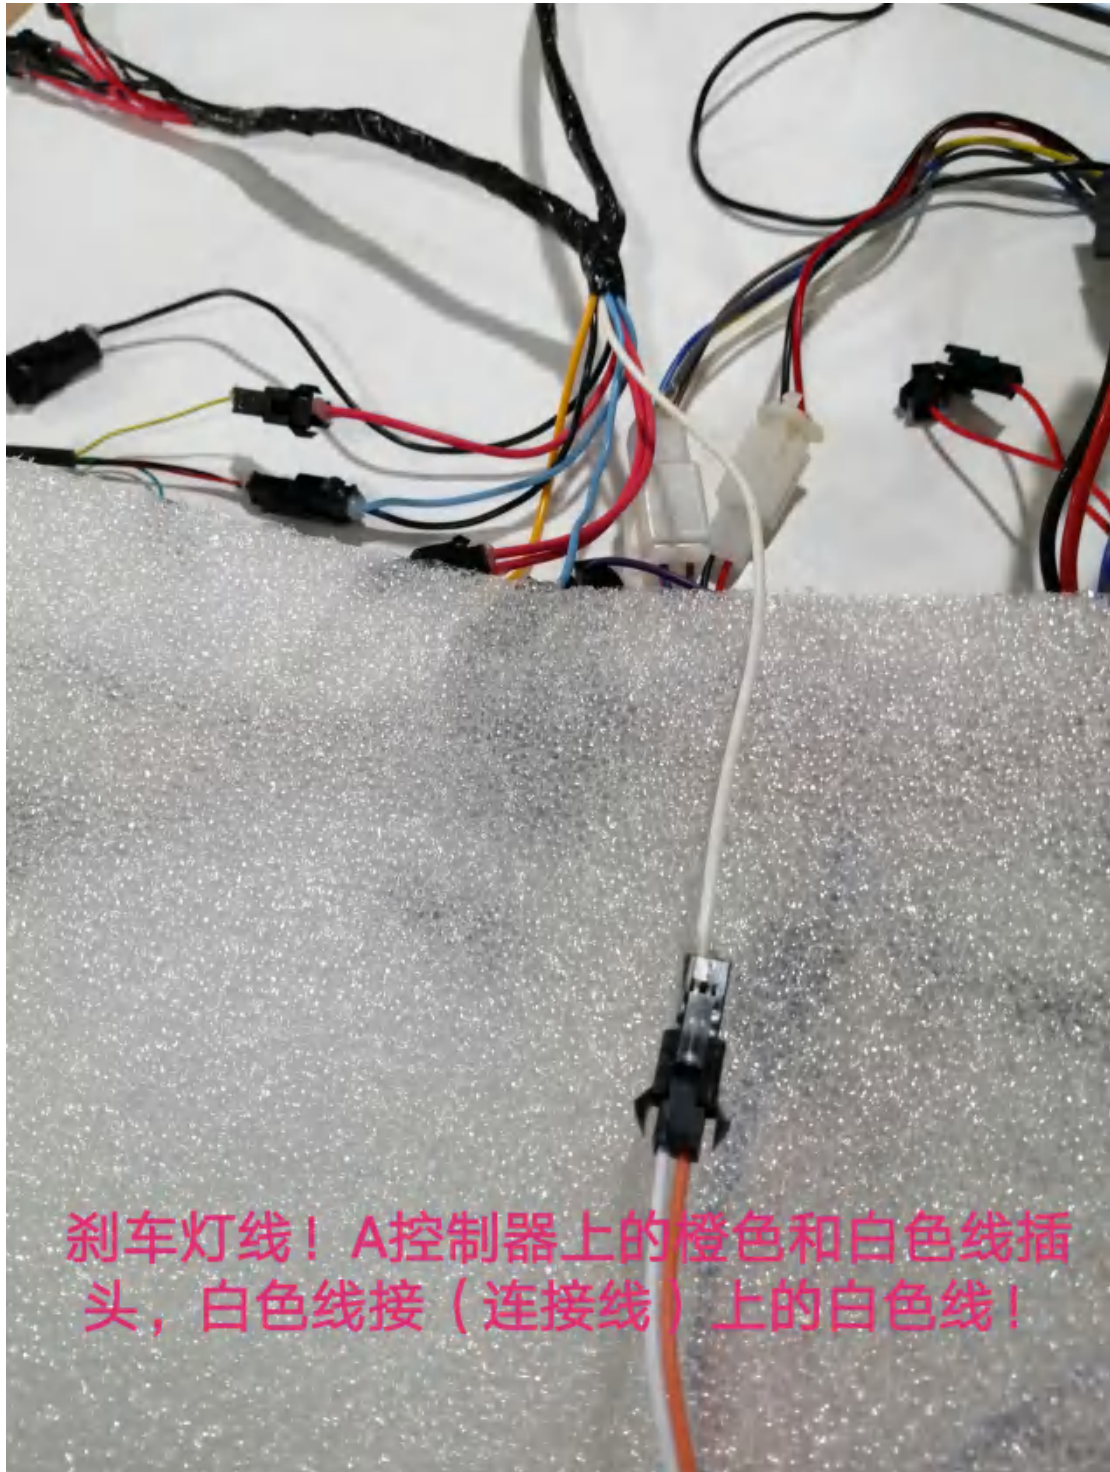

Connect the orange and white lines of the A controller and white line of the connection line.
It is the brake light line.

X60 线色功能



B控制器上防盗器插头

The alarm' plug from B controller

X60 线色功能



Electronic brake plug (EBS) from A and B controller.
Connect it as the picture.

X60 线色功能



Connect the white line from the wire and the white line from the B controller.
It is the brake signal line.

X60 线色功能



Connect the brown, grey and blue lines from the wire with the purple, black and blue lines from the B controller. It is the brake signal line.
It is the three levels speed line.

X60 线色功能



Connect the black, red and yellow lines from the wire with the black, orange and yellow lines from the B controller. It is the display line.

X60 线色功能



Connect the purple, pink and green lines from the wire with the red, green and black lines from the B controller.
It is the throttle line.

X60 线色功能




Connect the black, red and yellow lines with the black, orange and white lines from the conversion cable.
It is the voltage converter.

X60 线色功能



Converter power cord
Connect the orange and black lines with orange and black lines from A controller or B controller.

X60 线色功能

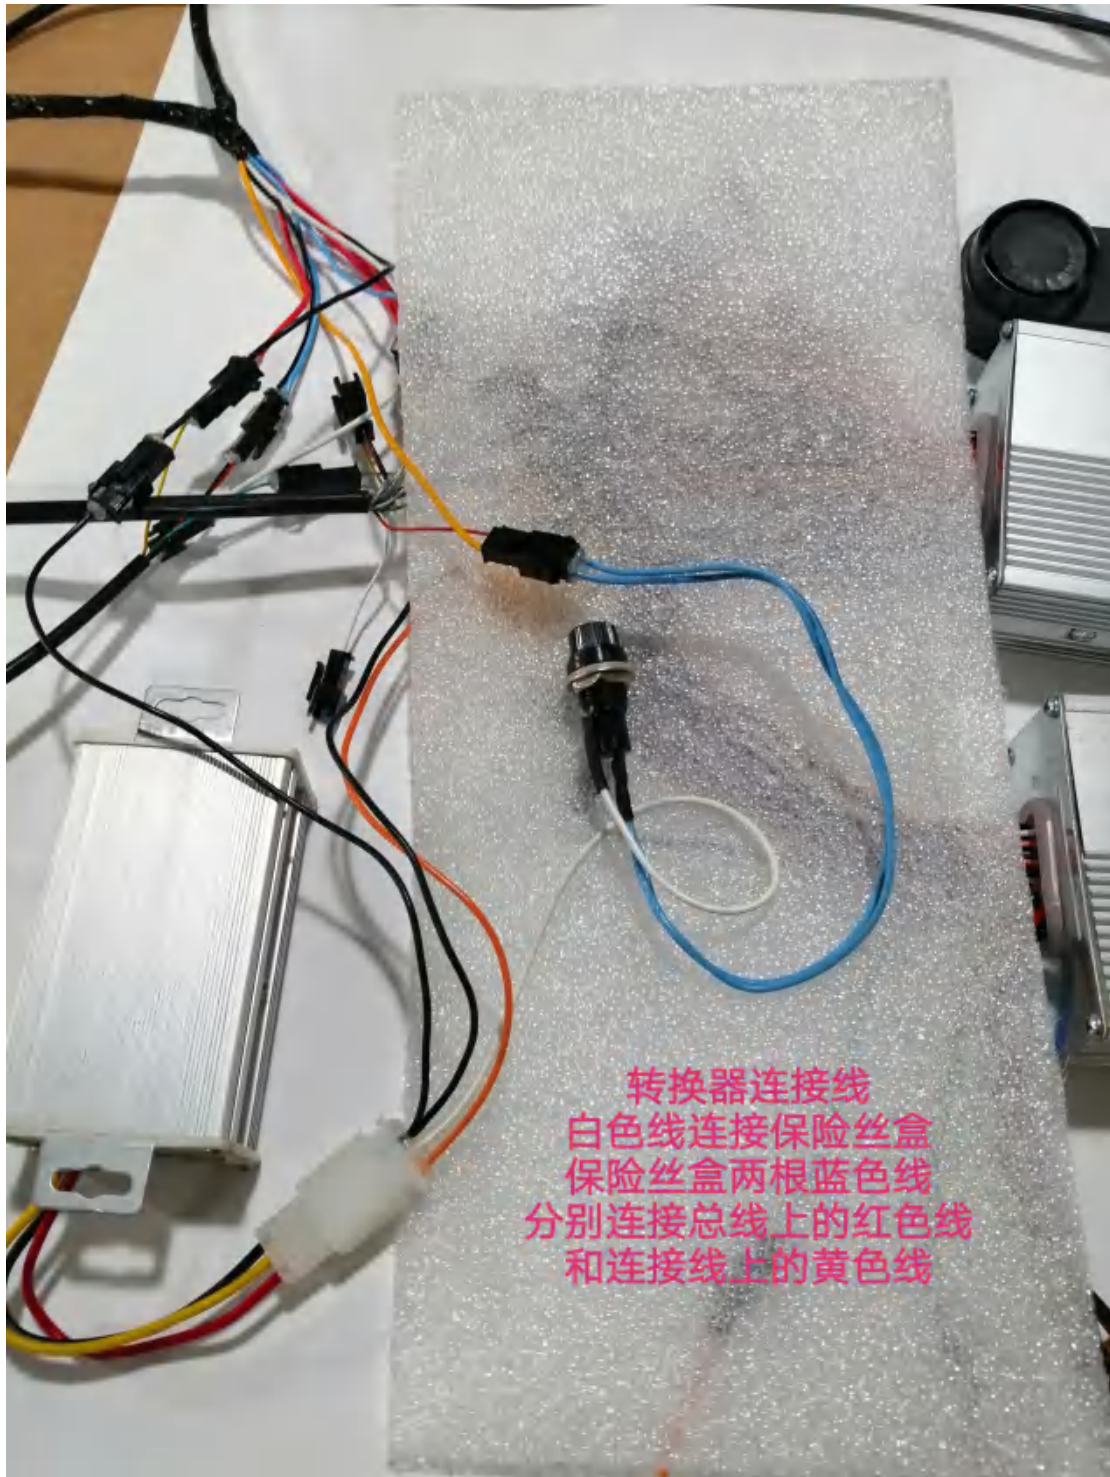

Converter cable

Connect the white line with fuse box.

Connect two blue lines from fuse box with the red lines from wire and yellow line from connection line.

X60 线色功能



Converter cable
Connect the black line with black line from connection line.

X60 线色功能



Connection line

Connect 4 red and black light lines with the front white light and sidelights.

Connect the yellow and white line with the brake light.

Connect the blue and black lines with the taillight.



front white line

X60 线色功能



Headlight connection line
Connect the green speaker line with the light blue from wire.
Connect the black light line with the blue and black lines from connection line.


X60 线色功能



Connection line

Connect the blue light wire with the light yellow line from the wire.
Connect two red bike lights with the light green and silver line.

X60 线色功能

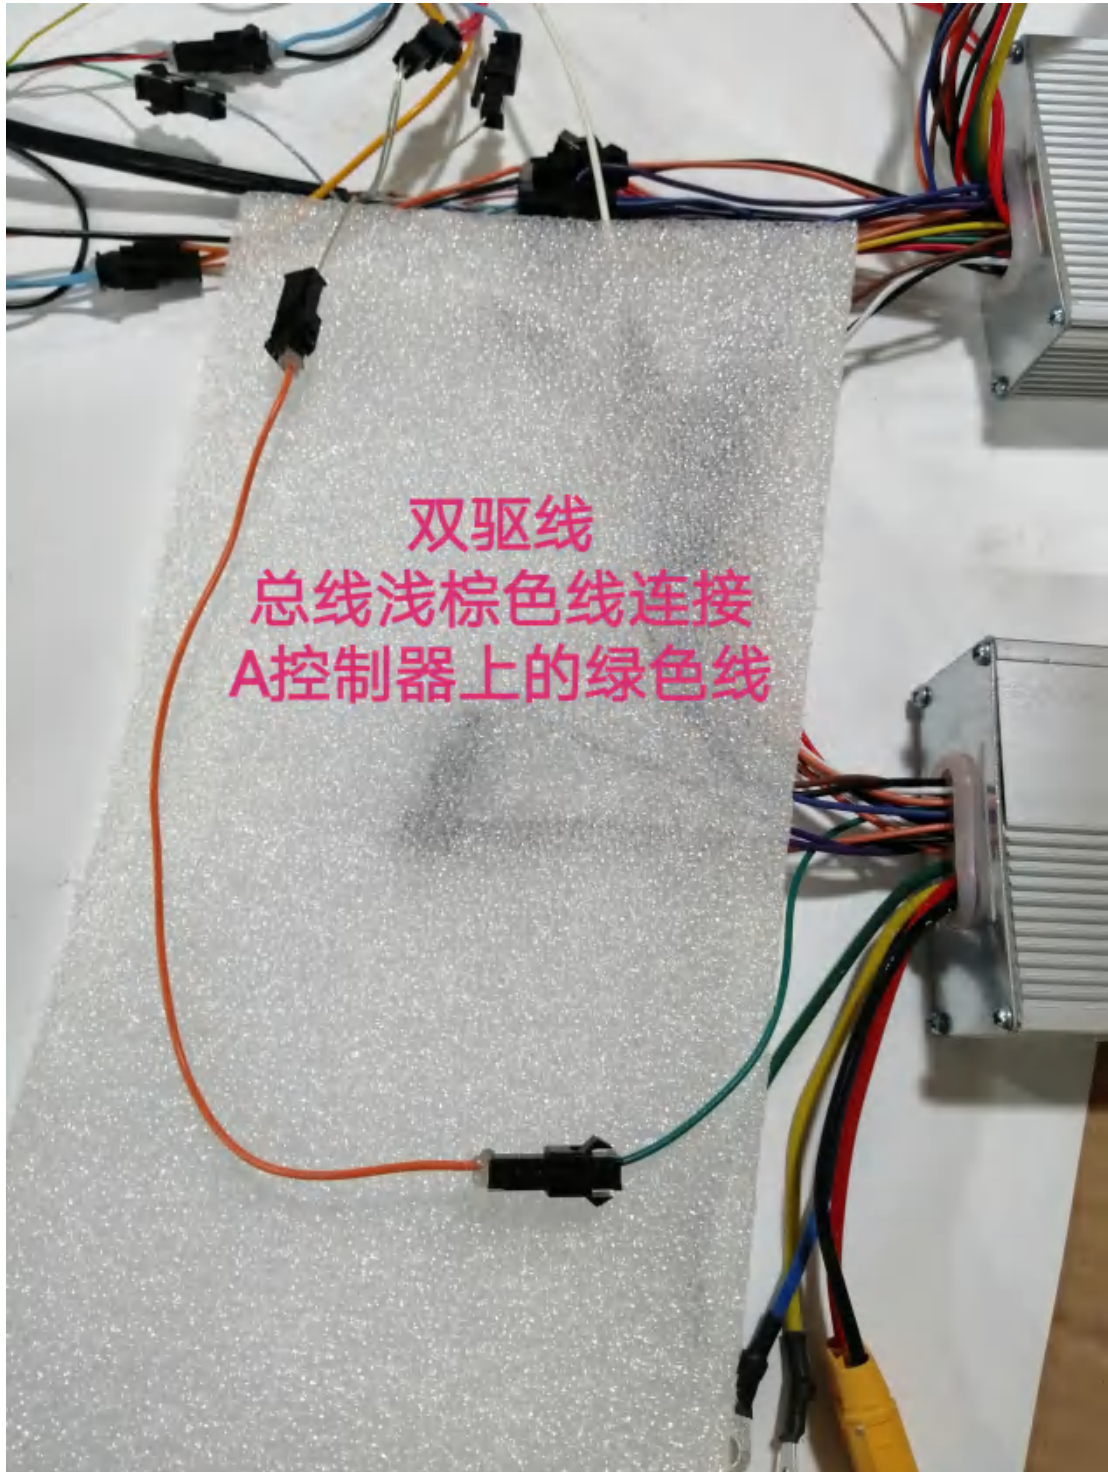

Dual drive line
Connect the brown line from wire with the green line from the A controller.